



—  
your partner  
in sensor  
technology.

# **+ Datasheet EE074**

**Temperature Probe with Modbus RTU**



# EE074

## Temperature Probe with Modbus RTU

The EE074 is used for highly accurate temperature measurement of liquid and gaseous media. The probe is optimized for demanding process and climate controls as required in the food and pharmaceutical industries, clean rooms and agriculture.

### Robust and Reliable

The high IP68 protection rating, the stainless steel enclosure as well as the encapsulated electronics ensure outstanding measuring performance even under harsh and condensing ambient conditions.

### Installation and Mounting

The electrical connection is realized with an M12x1 plug. Communication via Modbus RTU enables easy readout of the measured values. Accessories provide a great variety of mounting options. For example, the immersion well with innovative mounting spring is suitable for measurement in liquids and allows quick and safe sensor replacement. A selection of flanges facilitates installation in various applications.

### Configuration and Adjustment

With the free PCS10 configuration software and an optional configuration adapter, configuration and adjustment of the EE074 is possible via the PC.



---

EE074 temperature probe

# Features



## Mechanical construction

- IP68 stainless steel enclosure
- Encapsulated electronics

## Configuration and adjustment

- Free configuration software

## Measurement performance

- $\pm 0.1$  °C ( $\pm 0.18$  °F) accuracy
- Wide measuring range  
-70...+105 °C (-94...+221 °F)
- Compatible with dry block calibrators

## Installation

- Various probe lengths
- Immersion well
- Wall mounting clip

## Connection


- RS485 with Modbus RTU
- M12x1 connector

## Immersion well (optional)

- Up to PN 25 (363 psi) bar

## Innovative mounting spring

- For mounting the probe in the immersion well
- No fastening screw, no tools required

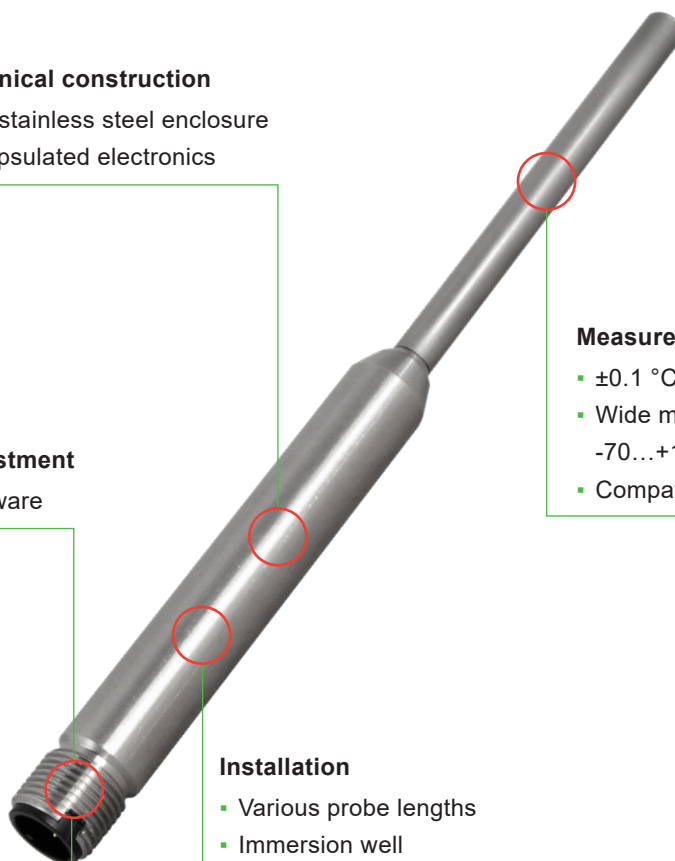

## Inspection certificate

According to DIN EN 10204-3.1

# Features

## E+E Modular Sensor Platform

The EE074 is compatible with the Sigma 05 host device of the E+E Modular Sensor Platform. Together they become a versatile, modular plug-and-play T sensor with analogue outputs and optional display. Besides EE074, Sigma 05 accommodates also other E+E intelligent sensing probes. See [www.epluse.com/sigma05](http://www.epluse.com/sigma05) for further details.




Sigma 05 with EE074


# Dimensions

Values in mm (inch)

## Temperature Probe

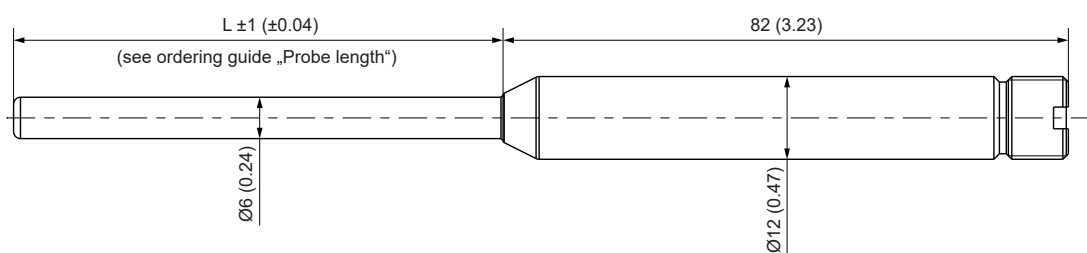

## Immersion Well (Optional)

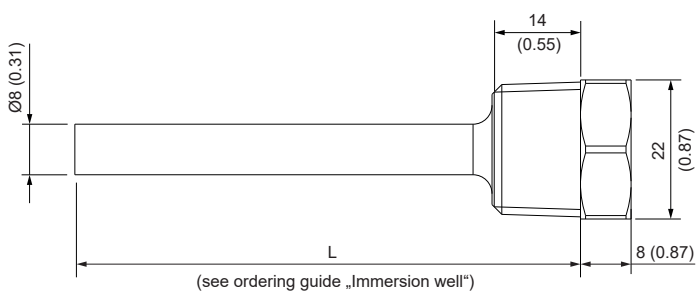

# Technical Data

## Measurands

### Temperature (T)

<b>Measuring range</b>	<b>Probe<sup>1)</sup></b>	-40...+80 °C (-40... +176 °F)
<b>Accuracy<sup>2)</sup></b> incl. hysteresis, non-linearity, temperature dependency of electronics and repeatability		<p>± ΔT [°C]</p> <p>T [°C]</p>
<b>Response time t<sub>63</sub>, typ.</b>	<b>In air @ 3.0 m/s</b> <b>In liquid</b>	75 s 21 s
<b>Measuring interval</b>		1 s

1) Extended temperature measuring range -70...+105 °C at the probe tip of version EE074-L305.

2) Traceable to international standards, administrated by NIST, PTB, BEV, ...

The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).

The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement). The accuracy is defined at a 24 V DC supply, 9600 Baud, without termination resistor and a polling interval of ≥ 1 second. For the accurate measurement in air, please observe the installation note in the User Manual.

## Outputs




### Digital

<b>Digital interface</b>	RS485 (EE074 = 1 unit load)
<b>Protocol</b>	Modbus RTU
<b>Factory settings</b>	9600 Baud, parity even, 1 stop bit, Modbus address 233
<b>Supported Baud rates</b>	9600, 19200, 38400, 57600, 76800 und 115200
<b>Measured data types</b>	FLOAT32 and INT16

1) Modbus map and communication settings: see User Manual and Modbus application note at [www.epluse.com/ee074](http://www.epluse.com/ee074).

# Technical Data

## General

<b>Power supply</b> class III  USA & Canada: Class 2 supply necessary	10 - 28 V DC
<b>Current consumption</b> , typ.	3 mA
<b>Electrical connection</b>	M12x1, 5 poles, stainless steel
<b>Humidity working range</b>	0...100 %RH
<b>Temperature working range</b> <b>Probe<sup>1)</sup></b> <b>Electronics</b>	-40...+80 °C (-40...+176 °F) -40...+80 °C (-40...+176 °F)
<b>Storage conditions</b>	-40...+80 °C (-40...+176 °F) 0...90 %RH
<b>Enclosure material</b>	Stainless steel 1.4404 (AISI 316L)
<b>Protection rating</b> <b>Probe</b> <b>Electrical connection<sup>2)</sup></b>	IP68 IP67
<b>Electromagnetic compatibility</b>	EN 61326-1      EN 61326-2-3      Industrial environment FCC Part15 Class A      ICES-003 Class A
<b>Conformity</b>	 
<b>Configuration and adjustment</b>	PCS10 Product Configuration Software ( <a href="#">free download</a> ) and configuration adapter

1) Extended temperature working range -70...+105 °C at the probe tip of version EE074-L305.  
2) The IP67 protection rating applies when plugged into an appropriate M12x1 socket.

## Mounting Accessories (Optional)

### Immersion Well

<b>Material</b>	Brass nickel-plated Stainless steel (tube: 1.4571 / 316Ti, mounting thread: 1.4404 / 316L)				
<b>Pressure rating</b> <b>Brass</b> <b>Stainless steel</b>	PN 15 bar (218 psi) PN 25 bar (363 psi)				
<b>Max. flow speed</b>		<b>50 mm (1.97")</b>	<b>100 mm (3.94")</b>	<b>135 mm (5.31")</b>	<b>285 mm (11.22")</b>
	<b>Brass</b>	26 m/s	12 m/s	6 m/s	1 m/s
	<b>Stainless steel</b>	29 m/s	15 m/s	9 m/s	2 m/s

# Ordering Guide

Feature	Description	Code	
Hardware		EE074-	
	Probe length	71,5 mm (2.82")	L70
		156,5 mm (6.16")	L155
		306,5 mm (12.07")	L305

## Order Example


### EE074-L305

Feature	Code	Description
Probe length	L305	306.5 mm (12.07")

## Accessories

For further information see datasheet [Accessories](#).

Description	Code				
E+E Product Configuration Software (Free download: <a href="http://www.epluse.com/pcs10">www.epluse.com/pcs10</a> )	PCS10				
Modbus configuration adapter	HA011018				
Connection cable M12 - free cable ends 5 poles, shielded	1.5 m (4.9 ft)	HA010819			
	5 m (16.4 ft)	HA010820			
	10 m (32.8 ft)	HA010821			
Y-style splitter M12 - M12 1 plug ↔ 2 sockets for M12, 5 poles	HA030204				
M12 connector 4 poles socket, for self assembly	HA010707				
Protection cap for M12 socket	HA010781				
Protection cap for M12 plug	HA010782				
Plastic flange Ø6 mm (0.24")	HA401101				
Stainless steel flange Ø12 mm (0.47")	HA010201				
Wall mounting clip Ø12 mm (0.47")	HA010211				
Immersion well - thread R ½" ISO	Length in mm (inch)	50 (1.97")	100 (3.94")	135 (5.31")	285 (11.22")
	Brass	HA400101	HA400104	HA400102	HA400103
	Stainless steel	HA400201	HA400204	HA400202	HA400203
Immersion well - thread ½" NPT	Length in mm (inch)	50 (1.97")	100 (3.94")	135 (5.31")	285 (11.22")
	Brass	HA400111	HA400114	HA400112	HA400113
	Stainless steel	HA400211	HA400214	HA400212	HA400213

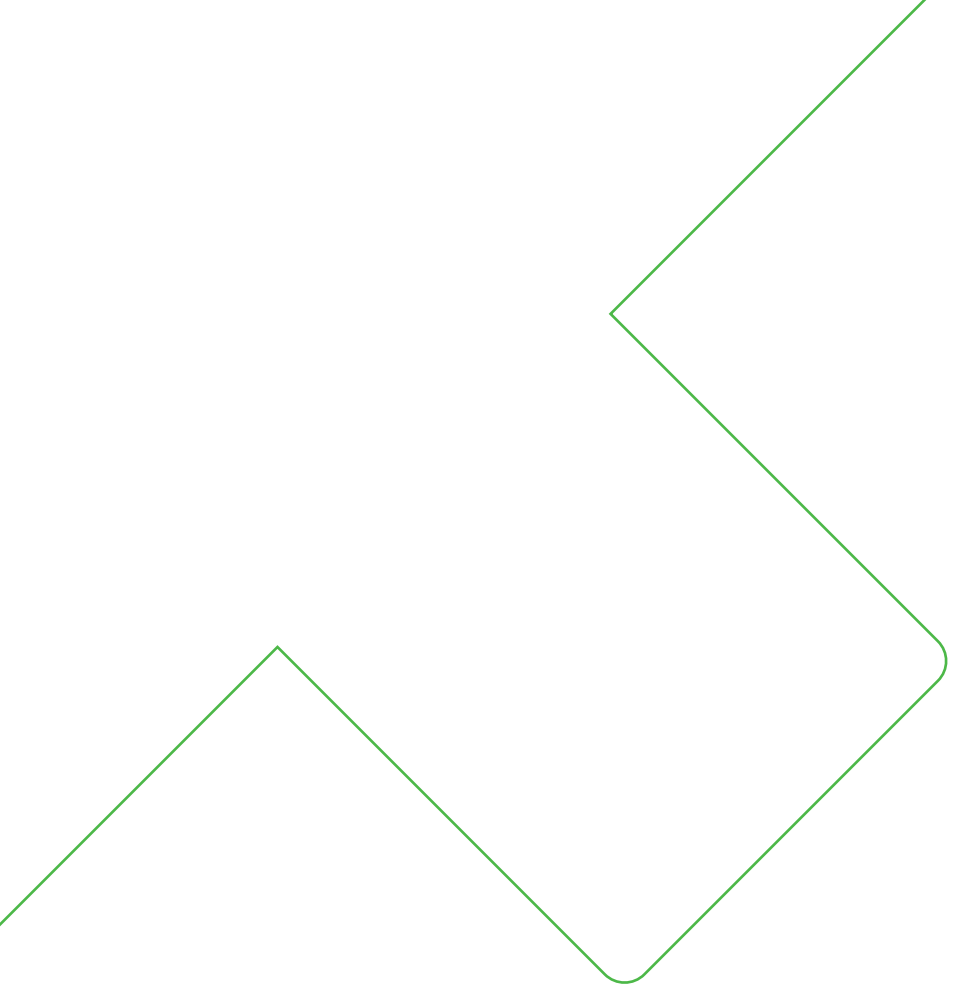

Company Headquarters &  
Production Site

**E+E Elektronik Ges.m.b.H.**  
Langwiesen 7  
4209 Engerwitzdorf | Austria  
T +43 7235 605-0  
F +43 7235 605-8  
info@epluse.com  
www.epluse.com

Subsidiaries

**E+E Sensor Technology (Shanghai) Co., Ltd.**  
T +86 21 6117 6129  
info@epluse.cn

**E+E Elektronik France SARL**  
T +33 4 74 72 35 82  
info.fr@epluse.com

**E+E Elektronik Deutschland GmbH**  
T +49 6171 69411-0  
info.de@epluse.com

**E+E Elektronik India Private Limited**  
T +91 990 440 5400  
info.in@epluse.com

**E+E Elektronik Italia S.R.L.**  
T +39 02 2707 86 36  
info.it@epluse.com

**E+E Korea Co., Ltd.**  
T +82 31 732 6050  
info.kr@epluse.com

**E+E Elektronik Corporation**  
T +1 847 490 0520  
info.us@epluse.com

Version v1.5 | 03-2023  
Modification rights reserved



—  
your partner  
in sensor  
technology.

[www.epluse.com](http://www.epluse.com)